


PRODUCT DATA SHEET

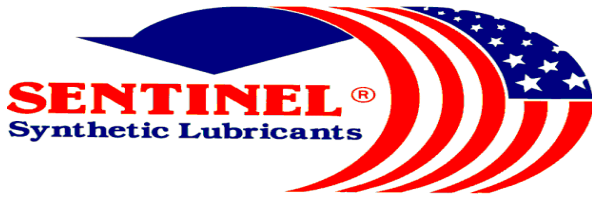

SILICONE "S" SILICONE LUBRICANT

PRODUCT DESCRIPTION

Sentinel's Silicone "S" is a product suitable for use as a lubricant in food processing plants. The silicone content, a dimethylpolysiloxane fluid, is formulated into a 100% volatile vehicle. The propellant and vehicle quickly vaporizes leaving only the basic silicone content. This formulation is prepared using silicone, which meets FDA regulations (21 CFR 178.3570) where no more than 10ppm silicone is permitted as incidental contact with food processing equipment where incidental food contact may occur. Serves as an excellent lubricant to prevent sticking of glues, adhesives, food and other materials to high speed processing equipment. Makes cleaning easy and keeps paper and plastic from sticking, tearing and jamming. Also stops pile-up and ink smear. Excellent for lubricating slides, conveyors, guides, ways, wood, plastic, rubber, and most non-metal to metal friction points.

Serves as a preservative for rubber and plastic seals and parts. Suitable for preventing sticking on agitator shafts, props, tanks, blades, ovens, evaporators, grinders, saws, slicers, coils, vessels, freezing trays, bake tins, conveyors, seals, O-rings, and valve parts.

DIRECTIONS: Shake can well before use. Can temperature should be 18°C (65°F) or warmer. (*WARNING: Never use direct heat to warm aerosol cans! ONLY warm water should be used!*) Clean mating surfaces before application and spray area to be lubricated. Spray a light coating and if over sprayed, wipe off excess.

Sentinel's "S" line of spray lubricants is a non-ozone depleting product specially formulated for industry. Sentinel's "S" line contains no CFC's, HCFC's, Methyl chloroform, or any other material known to affect the stratospheric ozone.

TYPICAL CHARACTERISTICS

Appearance	Clear
Flash Point of film, °C (°F)	> 316 (600)
Service Temperature Range, °C (°F)	-40 to 204 (-40 to 400)
Weight Loss After 24 Hours @ 149 °C (300 °F)	0.5% maximum
Viscosity Temperature Coefficient	0.971
USDA Classification	H-1
Net Weight per 20oz Aerosol Can	13 oz. (369g)
PIN #	01011

TO ORDER OR FOR ADDITIONAL INFORMATION

QUALITY WITHOUT QUESTIONS!

SENTINEL LUBRICANTS CORP.
P.O. BOX 69-4240 MIAMI, FLORIDA 33269-1240
15755 NW 15TH AVENUE MIAMI, FLORIDA 33169-5603
PH. (305) 625-6400 (800) 842-6400 FAX (305) 625-6565
WWW.SENTINELSYNTHETIC.COM